



# **Hesmor**


## Wind Velocity Measuring System



**Construction**

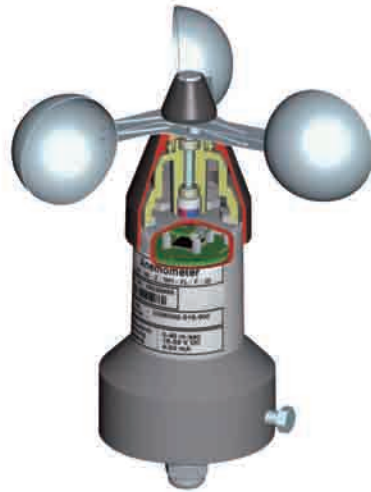

**Measuring principle**

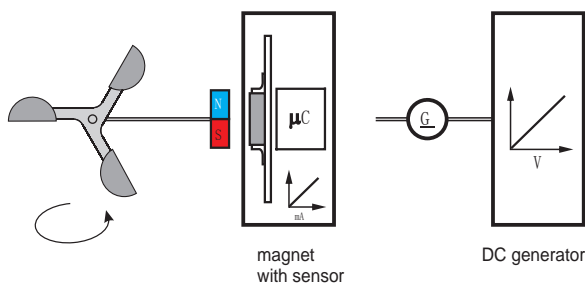

Wind velocity measuring systems are used for detecting and, in connection with the appropriate indicator, monitoring a maximum wind velocity. They are used mainly in safety and monitoring systems of cranes and excavators, on ski-lifts and cablecars, wind energy plants as well as in meteorological stations.

Two models are available. One with pendulum orientation, especially suited for the attachment on jibs of mobile cranes, and a common one, pedestal mounted or mounted on a vertical post.

Because of their particular capsuled assembly both versions, i. e. with magnetic measuring system as well as with generator, have proved to be very reliable – even under extreme environmental conditions.

Cross arms – with rigid or springy bars – and crown are designed for a reliable outskirt area use.

For applications in the temperature range down to minus 50°C there is optionally available a mounting arrangement for a temperature controlled heating device.

For special applications high-quality surfaces and versions for anti-gas areas are available.

The wind velocity indicators are optionally obtainable with different analogue or digital outputs.

The Indicator contains an electronic LED circular bar graph display with a maximum limiting position contact, adjustable from outside.


The measuring value is represented in form of a green bar graph display. By a read-out potentiometer on the front side the limit value mark can be preselected within the chain of diodes. If the green shining actual value display passes over the red shining mark of the preselected limiting value, the colour of the actual value display changes to red. At the same time, the limit value relay switches over and signals the passing over the maximum value by switching over a floating contact.

The Switchgear is an electronic comparator, constructed as a plastic casing, surfacetype, suitable for screwing or rail mount according to DIN 46277. Up to a maximum of four limit indicators/comparators can be integrated in one casing unit, their switching points can be adjusted separately by means of trimming potentiometers between 0 and 100 % of the input quantity. The output signals are available via floating relay contacts, which are either normally-closed or normally-open contacts.

### Measuring systems



The magnetic measuring system allows an absolute wear-free and non-contact signal recording, even reliable under extreme environmental conditions. A corrosion-resistant cross arms-driven permanent magnet creates a signal change within the magnet sensor located inside a generally closed aluminium casing.

A downstream processor converts the magnet pulses into an analogue measuring signal of e. g. 4 – 20 or digitally coded (pulse output or CAN signal).

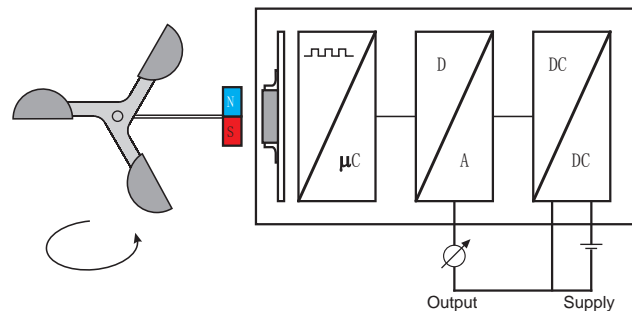


### Tacho-Generator



A tacho-generator incorporated into an aluminium casing is driven by the wind speed. Output signal, being proportional to the wind speed is taken in form of a voltage in two-wire circuit.

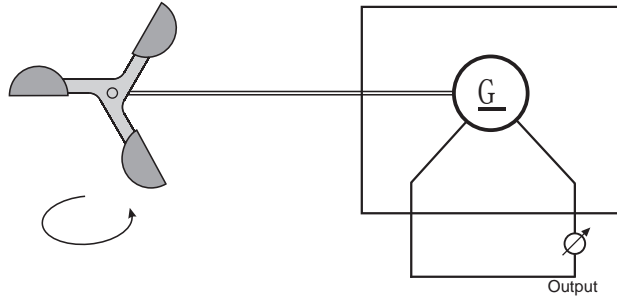

Applications



## Specifications


Electrical data		
Measuring system	magnetic	tacho-generator
Protection (casing)	IP66	IP64
Electrical connection	plug or cable	plug or cable
Measuring range	0 - 40 m/s (up to max. 50 m/s on request)	0 - 40 m/s (up to max. 50 m/s on request)
Current output	4 - 20 mA, $R_L \leq 600 \Omega$	
Voltage output	0 - 10 V, $R_L \geq 10 k\Omega$	
Digital output	CANopen	
Pulse output	customized	
DC generator		0 - 3.4 V at 0 - 40 m/s at $R_L = 500 \Omega$
Power supply	18 - 33 V DC	
Casing material	aluminium, grey coated	aluminium, grey coated
Cross arms	stainless steel	stainless steel
Heating device	with thermostat for temperatures up to -50°C	with thermostat for temperatures up to -50°C

### General data

Temperature range	-30°C up to +70°C
Weight	0.8 kg (with pendulum 1.2 kg)
Test voltage	500 V, 50 Hz, 1 min
Immunity to interference	EN 61 000-6-3
Transient emissions	EN 61 000-6-2
Shock	50 g, 6 ms
Vibration	4 g Sinus 5 - 100 Hz


Available in ex intrinsically safe version 

### Circuit

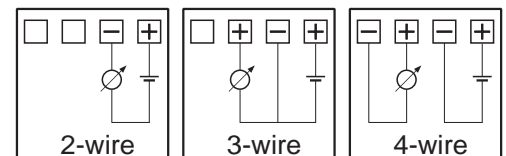


Models

Central fastening (pedestal for vertical post mounting)

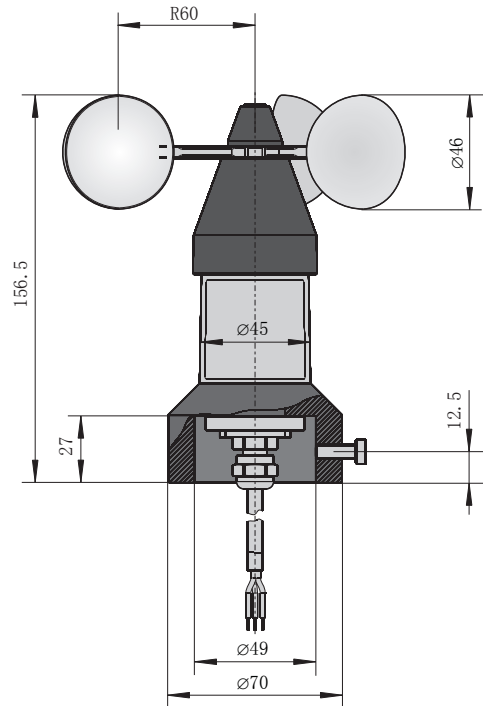


Pendulum (wall bracket)

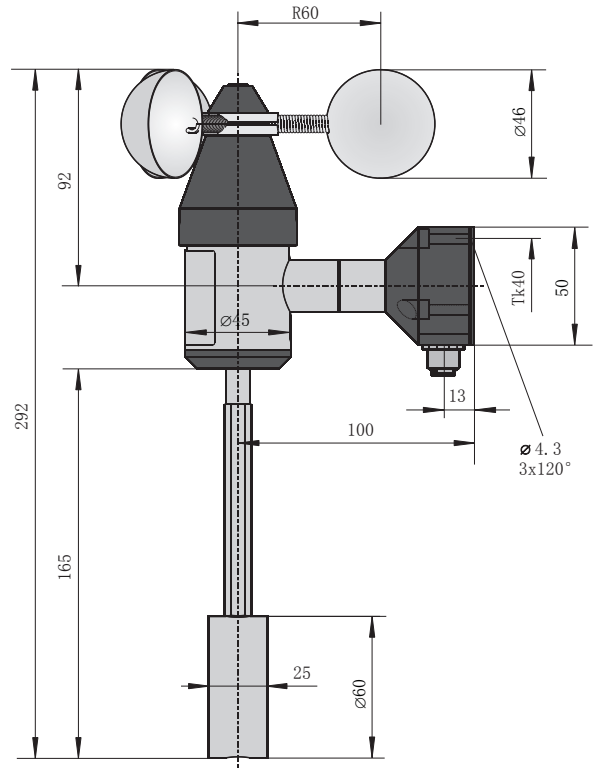


**Specifications**


Rigid cross arms are absolutely rigid and of stainless steel. They are used standardly for the wind speed measuring.

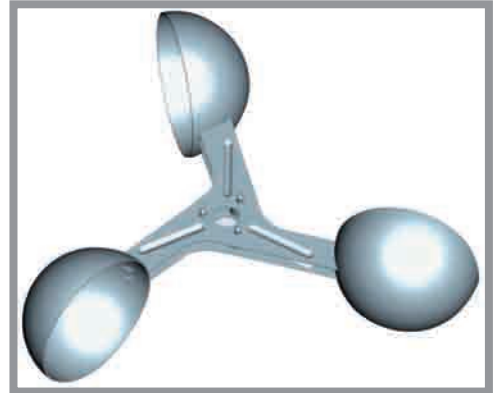

Springy cross arms Rigid bridges are replaced by springy cross arms in order to avoid mechanical stress mainly occur in cranes and excavators. Springy cross arms are mostly used in anemometers with pendulum orientation.

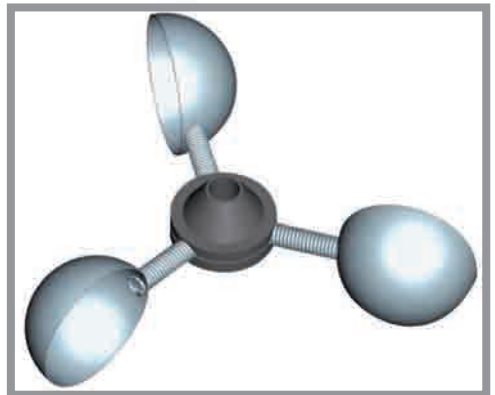


Heating device is optionally available as mounting arrangement inside the cross arms bearing. Thus ensures applications in the temperature range down to  $-50^{\circ}\text{C}$ . This accessory can be obtained for both anemometer versions.

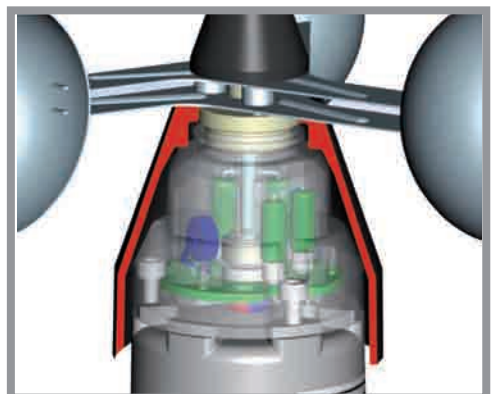

## Models

### Indicating Instruments

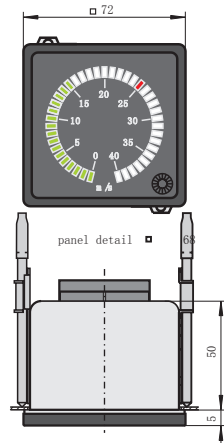


## Specifications

### Type GA-dig-1Sez/56

Model	Flush mounting casing
Bezel	72 mm x 72 mm
Actual value display	LED bar graph, green
Scale	0 - 40 m/s, 2: 2 m/s
Input	4 - 20 mA, Ri 50 Ω
Supply	18 - 33 V DC, <200 mA
Limit display	LED, red
Limit value output	Floating reversing switch max. 30 V, max. 500 mA
Temperature range	-30°C up to +70°C
Test voltage	500 V 50 Hz 1 min.
Weight	0.5 kg


### Switchgear

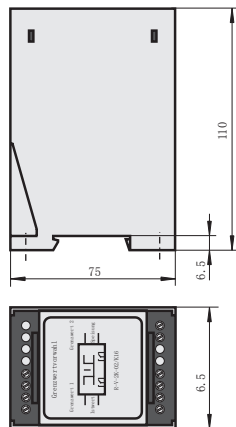

### Type R-V-2K-02/K16

Model	Standard rail mounting
Input	4 - 20 mA, Ri 50 Ω
Supply	18 - 33 V DC, <100 mA
Output	2 normally closed or normally open contacts max. 30 V, max. 500 mA
Switching point preselection	Separately by trimming potentiometers between 0 and 100% each
Temperature range	-30°C up to +70°C
Test voltage	500 V/50 Hz/1 min.
Weight	0.3 kg

### Terminal pin assignment

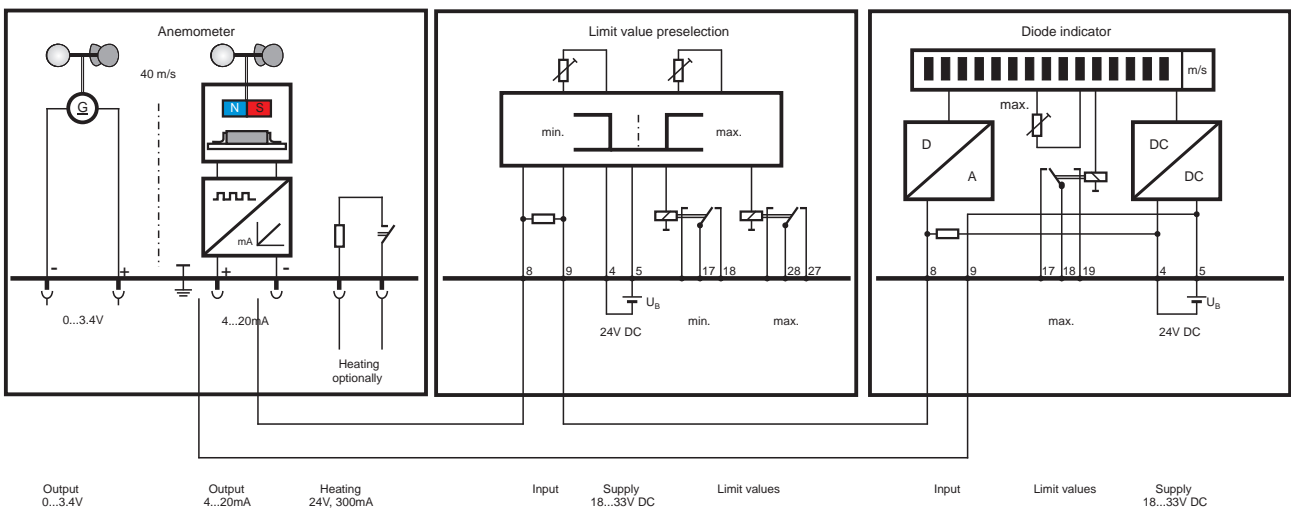



We develop, manufacture and market industrial sensors and control modules for use in industrial applications. We provide well-known national and international companies with good-quality, high-tech products. Fairness and openness in society and in our business relationships are important to us. We rely on long-term co-operation and protect our customers' investments by guaranteeing the compatibility of new components with already installed and components operating systems. The individual support of our customers from the start is of utmost importance at Hesmor. Hesmor offers customers a variety of customized solutions in sensor technology and control module technology. Our deep industry knowledge and flexible engineering service together with our experienced engineering of sensor technology and control module technology provide the customer with a customized product in a very efficient design engineering time. The result is a product that meets the customer's application delivered in a timely manner.



- Germany Headquarters
- ▲ Centre for Asia Pacific Marketing
- North America Dealers

**Hesmor**

Hesmor GmbH

Zedernweg 7. D-52076 Aachen  
Tel: +49-2408-1461145  
Fax: +49-2408-1461152  
E-mail: sales@hesmor.de  
Website: www.hesmor.de